

Enhancing Vibrotactile Signal Propagation using Sub-Surface 3D-Printed Waveguides

Ahmed Farooq
Tampere University
Tampere, Finland
Ahmed.Farooq@tuni.fi

Hong Z. Tan
Purdue University
West Lafayette, USA
Hongtan@purdue.edu

Roope Raisamo
Tampere University
Tampere, Finland
Roope.Raisamo@tuni.fi

ABSTRACT

The mediation of haptic feedback largely depends on physical properties of the surface of interaction and its internal structure. Most mobile devices today are assembled using a wide range of components with varied physical properties that can limit the propagation of tactile signals. For that reason, it is important to understand how common materials used in assembling mobile devices relay vibration signals and develop techniques of effectively mediating haptic feedback uniformly throughout the entire device. This research compares three off-the-shelf waveguide materials and one custom-designed 3D-printed ABS structure for creating feedback signals on flat interaction surfaces. Preliminary results indicate that by altering the internal structure of the interaction surface we can reduce attenuation and integration of the applied signal and improving the overall haptic experience.

Author Keywords

Haptic Mediation; global device actuation.

CSS Concepts

• **Human-centered computing~Human computer interaction (HCI); Haptic devices;** User studies.

INTRODUCTION

Calibrated vibration signals have been used to convey tactile information in various devices [2, 3, 11, 12, 17, 18]. In global device actuation, the generated signal is intended to propagate uniformly across the entire device. However, due to the nature and assembly of current interaction devices, signal attenuation and integration can greatly affect this propagation [7, 8]. Therefore, applied signals may appear considerably altered when sampled farther away from the actuation source. To reduce this signal distortion, it is possible to utilize haptic waveguides that can mediate the source signals more efficiently [1, 9, 13, 15]. Depending on the material properties as well as the structural design of the waveguide, applied signals may be enhanced to create more reliable and consistent global device actuation. In this

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from Permissions@acm.org.

UIST 2020, October 20–23, 2020, Minneapolis, MN, USA.

ACM © 2020 Copyright is held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-6708-0/20/04...\$15.00.

DOI: <https://doi.org/10.1145/3313831.XXXXXXX>

*update the above block and DOI per your rightsreview confirmation (provided after acceptance)

research we discuss a technique to create Embedded Haptic Waveguides (EHWs) within a 3D-printed surface and compare its efficiency with common materials used in mobile devices (Gorilla glass, Plexiglas and aluminum.) The goal of this research is to improve global device actuation [4, 5, 9, 10] by reducing signal attenuation and integration on the interaction surface.

3D-Printed Embedded Haptic Waveguides

A waveguide is a medium where the wave propagation is bounded in two directions of space and free in the third [6, 9, 10]. With current advances in 3D printing it is possible to create calibrated wave guides using specific materials. We know that there is a close correlation between the material properties (ρ , Y) of the waveguide and the resonance frequency of the system [14, 16]. In most cases these properties remain fixed throughout the entire surface. However, within a 3D-printed structure it is possible to vary these properties by altering fill rate and combining composite materials together (i.e. ABS). Moreover, in our testing we found that it is also possible to create multiple waveguides within the 3D-printed object by designing 1.5mm wide chambers or shaft-like indentations inside the object itself (Fig. 1) with a ratio of solid waveguide to empty space of 1:1. The solid material acts as the waveguide while the empty space provides an insulation around the waveguide reducing the unwanted propagation of the applied signals. This technique reduces unnecessary energy dissipation and guides the applied signals from the actuation source to the point of contact. Using this process, we were able to develop embedded waveguides specifically designed to relay actuation signals throughout the entire device without signal attenuation.

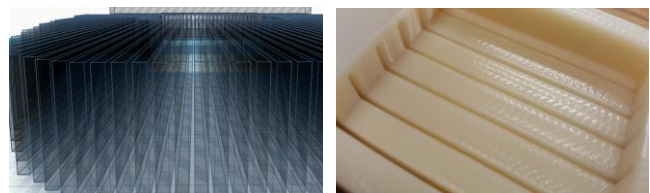


Figure 1. 3D-printed waveguides with embedded shafts (left) and chambers with surface grooves (right) to enhance mediation of vibration signals.

EXPERIMENT DESIGN

To measure the efficiency of continuous actuation signal at four frequencies (100, 140, 180, 220Hz) traveling through the four waveguides, we mounted the 3+1 waveguides to

the touchscreen of a Microsoft Surface 4 device (Fig. 2). We also attached a Tectonics TEAX14C02-8 actuator on top of each waveguide surface and by using a unidirectional piezoelectric sensor (WS-16025YDW) we measured the vertical components of vibration introduced by the actuator at 95mm from the actuator. To gauge any perceived difference on two points of the given surfaces, we asked 22 university students (8 male, 14 female) to feel a 120Hz sinusoidal signal generated by the TEAX14C02-8 actuator (same setup as above) on each surface at two discrete points. Point A was 28mm away from the actuator and point B was 190mm away. The participants were asked to rate the perceived difference between the signals felt at point A and point B on a scale of 0-10, where 0 represented no difference and 10 represented completely different signals, following the method in Zwislocki & Goodman [19] (Fig. 2).



Figure 2. Setup for technical evaluation and user study.

RESULTS

Results from both sets of measurement show that the current version of the custom-designed 3D-printed waveguide was more efficient at relaying haptic signals among the four surfaces. Wave propagation measurements recorded at the four frequencies (100, 140, 180 and 220Hz) showed that the 3D-printed waveguide was better at maintaining signal integrity while reducing attenuation and signal decay (Fig. 3 and 4).

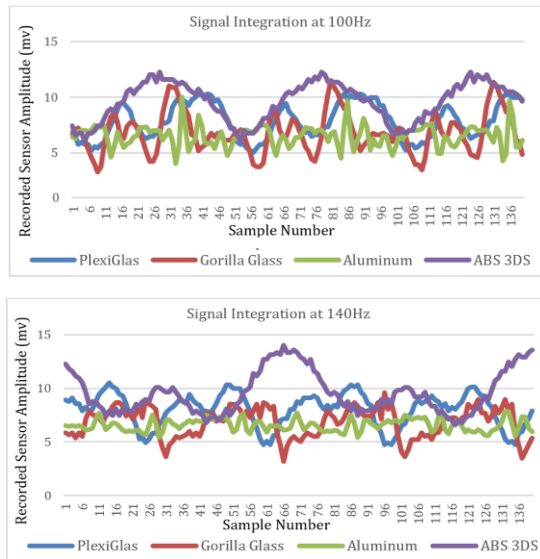


Figure 3. 100Hz (top) and 140Hz (bottom) signals recorded at 95mm from the source actuator to illustrate distortion / attenuation in the 4 surfaces.

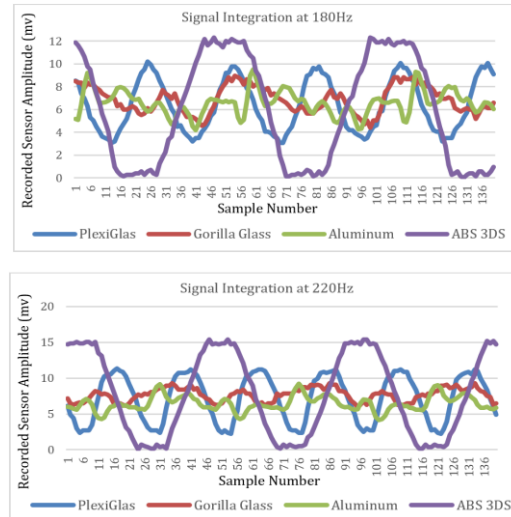


Figure 4. 180Hz (top) and 220Hz (bottom) signals recorded at 95mm from the source actuator to illustrate distortion / attenuation in the 4 surfaces

Results for the measured frequencies also showed little signal attenuation and parasitic vibrations for the 3D-printed waveguides across the board. However, we can see that both the aluminum and Gorilla glass surfaces attenuated the applied signal, mostly altering the waveform by integrating the applied signals [20]. We also observed signal degradation and integration in the Plexiglas waveguide, however it was not as severe as the aluminum and Gorilla glass surfaces. Similarly, results from the user study (Fig 5) indicated that the participants rated the actuation signal received at points A and B, as more similar and far more consistency on the 3D-printed waveguide, as compared to the other waveguide surfaces.

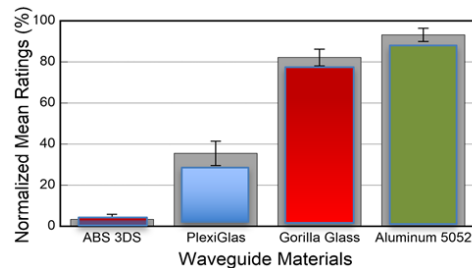


Figure 5. Comparison of mean ratings of perceived differences

CONCLUSION

This research focused on evaluating three off-the-self waveguide materials and one custom designed 3D-printed structure for creating controlled global device actuation. Results show that the custom designed 3D-printed waveguide was able to relay the actuation signals with least attenuation and distortion with very little signal integration compared to the other three surfaces. This is visible at all the measured frequencies (100Hz, 140Hz, 180Hz, 200Hz and 220Hz). These results indicate that custom waveguide can be useful in improving the reliability and efficiency of vibrotactile feedback for surface-based interactions.

REFERENCES

- [1] Edgar Berdahl, Gunter Niemeyer, and Julius O. Smith. 2009. Using Haptic Devices to Interface Directly with Digital Waveguide-Based Musical Instruments. In Proceedings of New Interfaces of Musical Expression (NIME09), June 3-6, 2009, Pittsburgh, PA, pp. 183-186.
- [2] Hsiang-Yu Chen, Jaeyoung Park, Steve Dai, and Hong Z. Tan, "Design and evaluation of identifiable key-click signals for mobile devices," *IEEE Transactions on Haptics*, vol. 4, no. 4, pp. 229-241, 2011, doi: 10.1109/TOH.2011.21
- [3] Mélisande Biet, Frédéric Giraud, Betty Lemaire-Semail. 2007. Squeeze film effect for the design of an ultrasonic tactile plate. *IEEE Transactions on Ultrasonics, Ferroelectrics and Frequency Control*, Institute of Electrical and Electronics Engineers, 2007, 54 (12), pp.2678 - 2688. DOI: 10.1109/TUFFC.2007.596
- [4] Patrick Coe, Ahmed Farooq, Grigori Evreinov, Roope Raisamo. 2019. Generating Virtual Tactile Exciter for HD Haptics: A Tectonic Actuators Case Study. In Proceeding of IEEE SENSORS, Montreal, QC, Canada, October 2019, pp. 1-4. DOI: <https://doi.org/10.1109/SENSORS43011.2019.895656>
- [5] Patrick Coe, Grigori Evreinov, Roope Raisamo. 2019. In proceeding of 32nd Annual ACM Symposium on User Interface Software and Technology, (UIST '19), New Orleans, Louisiana, October 2019. pp.7-9. DOI: <https://doi.org/10.1145/3332167.3357097>
- [6] Ayoub Ben Dhiab, Charles Hudin. 2019. Confinement of Vibrotactile Stimuli in Narrow Plates - Principle and Effect of Finger Loading. In Proceeding 2019 IEEE World Haptics Conference (WHC) 9-12 July 2019. pp.431-436. DOI: <https://doi.org/10.1109/WHC.2019.8816081>
- [7] Ahmed Farooq. 2017. Developing technologies to provide haptic feedback for surface-based interaction in mobile devices, PhD Dissertation, University of Tampere, Faculty of Communication Sciences. DOI: <http://tampub.uta.fi/handle/10024/102318>
- [8] Ahmed Farooq, Philipp Weitz, Grigori Evreinov, Roope Raisamo, Daisuke Takahata. 2016. Developing a stick-slip based kinesthetic touchscreen system for real-time stylus manipulation. In Proceedings of IEEE SENSORS Conference (SENSORS), October 30 - November 2, 2016, Orlando Florida, 1-3. DOI: <https://doi.org/10.1109/ICSENS.2016.7808545>
- [9] Richard Feynman. The Feynman Lectures on Physics, New Millennium Edition, Chapter 24: Waveguides. Retrieved April 2, 2020 from https://www.feynmanlectures.caltech.edu/II_24.html
- [10] Charles Hudin, Jose Lozada and Vincent Hayward. 2015. Localized Tactile Feedback on a Transparent Surface Through Time-Reversal Wave Focusing. *IEEE Transactions on Haptics*, 2015, vol. 8, n. 2 pp. 188-198. DOI: <https://doi.org/10.1109/TOH.2015.2411267>
- [11] Johan Kildal. 2010. 3D-press: Haptic Illusion of Compliance when Pressing on a Rigid Surface. In Proceedings of International Conference on Multimodal Interfaces and the Workshop on Machine Learning for Multimodal Interaction (ICMI-MLMI '10). ACM, New York, NY, USA, Article 21, 8, pages. DOI: <http://dx.doi.org/10.1145/1891903.1891931>
- [12] Jin Ryong Kim, Xiaowei Dai, Xiang Cao, Carl Picciotto, Desney Tan, Hong Z. Tan. 2012. A Masking Study of Key-Click Feedback Signals on a Virtual Keyboard. In Proceedings of in EuroHaptics: Perception, Devices, Mobility, and Communication, 2012, pp. 247-257. DOI: https://doi.org/10.1007/978-3-642-31401-8_23
- [13] Kac, Mark. Review: Philip M. Morse and Herman Feshbach. 2007. Methods of theoretical physics. Bull. Amer. Math. Soc. 62 (1956), no. 1, 52--54. <https://projecteuclid.org/euclid.bams/1183520450>
- [14] Lucie Pantera and Charles. Hudin. 2019. Sparse Actuator Array Combined with Inverse Filter for Multitouch Vibrotactile Stimulation. In Proceeding of 2019 IEEE World Haptics Conference (WHC), Jul. 2019, pp. 19-24. DOI: <https://doi.org/10.1109/WHC.2019.8816107>
- [15] Allan D. Pierce. 1981. Acoustics, An Introduction to Its Physical Principles and Applications, Chapter 7. Originally published in 1981; Reprinted in 1989. Acoustical Society of America ISBN: 0883186128.
- [16] Singiresu S. Rao. 2006. Vibration of Continuous Systems, Chapter 9: "Longitudinal Vibration of Bars", 234-270, John Wiley & Sons, Inc, New York, NY.
- [17] Yon Visell, Bruno L. Giordano, Guillaume Millet, Jeremy Cooperstock. 2011. Vibration influences haptic perception of surface compliance during walking. *PLoS One*. 2011 March; 6(3) e17697. DOI: <https://dx.doi.org/10.1371/journal.pone.0017697>
- [18] Ma Zhaoyuan, Darren Edge, Leah Findlater, and Hong Z. Tan, "Haptic keyclick feedback improves typing speed and reduces typing errors on a flat keyboard," in 2015 IEEE World Haptics Conference (WHC), 22-26 2015, pp. 220-227, DOI: <https://doi.org/10.1109/WHC.2015.7177717>
- [19] Jozef J. Zwillocki and Dan Goodman. 1980. Absolute scaling of sensory magnitudes: A validation. *Perception & Psychophysics*, vol. 28, pp.28-38, 1980. DOI: <https://doi.org/10.3758/BF03204312> http://www.acm.org/class/how_to_use.html
- [20] Ahmed Farooq, Grigori Evreinov, Roope Raisamo, Daisuke Takahata. (2015). Evaluating Transparent Liquid Screen Overlay as a Haptic Conductor. In

Proceedings of IEEE SENSORS Conference, 96-99,
ISBN: 978-1-4799- 8203-5, IEEE NJ, USA ©2016.
<https://doi.org/10.1109/ICSENS.2015.7370186>